De Bruijn Sequences

Prepared by Mark on February 26, 2026
Based on a handout by Glenn Sun

Part 1: Introduction

Example 1:
A certain electronic lock has two buttons: `0` and `1`. It opens as soon as the correct two-digit code is entered, completely ignoring previous inputs. For example, if the correct code is 10, the lock will open once the sequence `010` is entered.

Naturally, there are $2^2 = 4$ possible combinations that open this lock.
If we don't know the lock's combination, we could try to guess it by trying all four combinations. This would require eight key presses: `0001101100`.

Problem 2:
There is, of course, a better way.
Unlock this lock with only 5 keypresses.

Now consider the same lock, but configured with a three-digit binary code.

Problem 3:
How many codes are possible?

Problem 4:
Show that there is no solution with fewer than three keypresses

Problem 5:
What is the shortest sequence that is guaranteed to unlock the lock?
Hint: You'll need 10 digits.

Part 2: Words

Definition 6:
An *alphabet* is a set of symbols.
For example, $\{\texttt{0}, \texttt{1}\}$ is an alphabet of two symbols, and $\{\texttt{a}, \texttt{b}, \texttt{c}\}$ is an alphabet of three.

Definition 7:
A *word* over an alphabet A is a sequence of symbols in that alphabet.
For example, `00110` is a word over the alphabet $\{\texttt{0}, \texttt{1}\}$.
We'll let $\varnothing$ denote the empty word, which is a valid word over any alphabet.

Definition 8:
Let v and w be words over the same alphabet.
We say v is a *subword* of w if v is contained in w.
In other words, v is a subword of w if we can construct v
by removing a few characters from the start and end of w.
For example, `11` is a subword of `011`, but `00` is not.

Definition 9:
Recall the lock problem from the previous page. Let's generalize this to the *n-subword problem*:

Given an alphabet A and a positive integer n, we want a word over A that contains all possible length-n subwords. The shortest word that solves a given n-subword problem is called the *optimal solution*.

Problem 10:
List all subwords of `110`.
Hint: There are six.

Definition 11:
Let $\mathcal{S}_n(w)$ be the number of subwords of length n in a word w.

Problem 12:
Find the following:

- $\mathcal{S}_n(\texttt{101001})$ for $n \in \{0, 1, ..., 6\}$
- $\mathcal{S}_n(\texttt{abccac})$ for $n \in \{0, 1, ..., 6\}$

Problem 13:
Let w be a word over an alphabet of size k.
Show that all of the following are true:

- $\mathcal{S}_n(w) \leq k^n$
- $\mathcal{S}_n(w) \geq \mathcal{S}_{n-1}(w) - 1$
- $\mathcal{S}_n(w) \leq k \times \mathcal{S}_{n-1}(w)$

Definition 14:
Let v and w be words over the same alphabet.
The word vw is the word formed by writing v after w.
For example, if $v = \texttt{1001}$ and $w = \texttt{10}$, vw is $\texttt{100110}$.

Problem 15:
Let F_k denote the word over the alphabet $\{\texttt{0}, \texttt{1}\}$ obtained from the following relation:

$$F_0 = \texttt{0}; \quad F_1 = \texttt{1}; \quad F_k = F_{k-1}F_{k-2}$$

We'll call this the *Fibonacci word* of order k.

- What are F_3, F_4, and F_5?
- Compute $\mathcal{S}_0$ through $\mathcal{S}_5$ for F_5.
- Show that the length of F_k is the $(k+2)^{\text{th}}$ Fibonacci number.

Problem 16:
Let C_k denote the word over the alphabet $\{\texttt{0}, \texttt{1}\}$ obtained by concatenating the binary representations of the integers 0, ..., $2^k - 1$.
For example, $C_1 = \texttt{01}$, $C_2 = \texttt{011011}$, and $C_3 = \texttt{011011100101110111}$.

- Compute $\mathcal{S}_0$, $\mathcal{S}_1$, $\mathcal{S}_2$, and $\mathcal{S}_3$ for C_3.
- Show that $\mathcal{S}_k(C_k) = 2^k - 1$.
- Show that $\mathcal{S}_n(C_k) = 2^n$ for $n < k$.

Hint: If v is a subword of w and w is a subword of u, v must be a subword of u.
In other words, the "subword" relation is transitive.

Problem 17:
Convince yourself that C_{n+1} provides a solution to the n-subword problem over $\{\texttt{0}, \texttt{1}\}$.
Note: C_{n+1} may or may not be an *optimal* solution—but it is a *valid* solution
Which part of Problem 16 shows that this is true?

Part 3: De Bruijn Words

Before we continue, we'll need to review some basic graph theory.

Definition 18:
A *directed graph* consists of nodes and directed edges.
An example is shown below. It consists of three vertices (labeled a, b, c),
and five edges (labeled $0, ..., 4$).



Definition 19:
A *path* in a graph is a sequence of adjacent edges,
In a directed graph, edges a and b are adjacent if a ends at the node which b starts at.

For example, consider the graph above.
The edges 1 and 0 are adjacent, since you can take edge 0 after taking edge 1.
0 starts where 1 ends.
0 and 1, however, are not: 1 does not start at the edge at which 0 ends.

Definition 20:
An *Eulerian path* is a path that visits each edge of a graph exactly once.
An *Eulerian cycle* is an Eulerian path that starts and ends on the same node.

Problem 21:
Find the single unique Eulerian cycle in the graph below.



Theorem 22:
A directed graph contains an Eulerian cycle iff...

- There is a path between every pair of nodes, and
- every node has as many "in" edges as it has "out" edges.

If the a graph contains an Eulerian cycle, it must contain an Eulerian path. (why?)
Some graphs contain an Eulerian path, but not a cycle. In this case, both conditions above must still hold, but the following exceptions are allowed:

- There may be at most one node where (number in − number out) = 1
- There may be at most one node where (number in − number out) = −1

Note: Either both exceptions occur, or neither occurs. Bonus problem: why?
We won't provide a proof of this theorem today. However, you should convince yourself that it is true: if any of these conditions are violated, why do we know that an Eulerian cycle (or path) cannot exist?

Definition 23:
Now, consider the n-subword problem over $\{0, 1\}$.
We'll call the optimal solution to this problem a *De Bruijn*[1] *word* of order n.

Problem 24:
Let w be the an order-n De Bruijn word, and denote its length with $|w|$.
Show that the following bounds always hold:

- $|w| \leq n2^n$
- $|w| \geq 2^n + n - 1$

Remark 25:
Now, we'd like to show that the length of a De Bruijn word is always $2^n + n - 1$
That is, that the optimal solution to the subword problem always has $2^n + n - 1$ letters.
We'll do this by construction: for a given n, we want to build a word with length $2^n + n - 1$ that solves the binary n-subword problem.

Definition 26:
Consider a n-length word w.
The *prefix* of w is the word formed by the first $n - 1$ letters of w.
The *suffix* of w is the word formed by the last $n - 1$ letters of w.
For example, the prefix of the word `1101` is `110`, and its suffix is `101`. The prefix and suffix of any one-letter word are both $\varnothing$.

Definition 27:
A *De Bruijn graph* of order n, denoted G_n, is constructed as follows:

- Nodes are created for each word of length $n - 1$.
- A directed edge is drawn from a to b if the suffix of a matches the prefix of b.
  Note that a node may have an edge to itself.
- We label each edge with the last letter of b.

G_2 and G_3 are shown below.

G_2



G_3

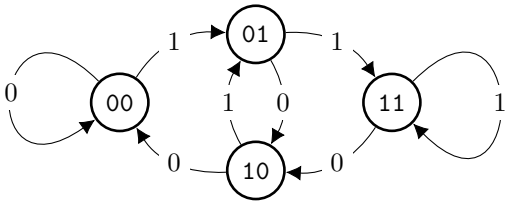

[1] Dutch. Rhymes with "De Grown."

Problem 28:
Draw G_4.

Problem 29:

- Show that G_n has 2^{n-1} nodes and 2^n edges;
- that each node has two outgoing edges;
- and that there are as many edges labeled 0 as are labeled 1.

Problem 30:
Show that G_4 always contains an Eulerian path.
Hint: Theorem 22

Theorem 31:
We can now easily construct De Bruijn words for a given n:

- Construct G_n,
- find an Eulerian cycle in G_n,
- then, construct a De Bruijn word by writing the label of our starting vertex, then appending the label of every edge we travel.

Problem 32:
Find De Bruijn words of orders 2, 3, and 4.

Let's quickly show that the process described in Theorem 31 indeed produces a valid De Bruijn word.

Problem 33:
How long will a word generated by the above process be?

Problem 34:
Show that a word generated by the process in Theorem 31 contains every possible length-n subword. In other words, show that $\mathcal{S}_n(w) = 2^n$ for a generated word w.

Remark 35:

- We found that Theorem 31 generates a word with length $2^n + n - 1$ in Problem 33,
- and we showed that this word always solves the n-subword problem in Problem 34.
- From Problem 24, we know that any solution to the binary n-subword problem must have at least $2^n + n - 1$ letters.
- Finally, Problem 30 guarantees that it is possible to generate such a word in any G_n.

Thus, we have shown that the process in Theorem 31 generates ideal solutions to the n-subword problem, and that such solutions always exist. We can now conclude that for any n, the binary n-subword problem may be solved with a word of length $2^n + n - 1$.

Part 4: Line Graphs

Problem 36:
Given a graph G, we can construct a graph called the
line graph of G (denoted $\mathcal{L}(G)$) by doing the following:

- Creating a node in $\mathcal{L}(G)$ for each edge in G
- Drawing a directed edge between every pair of nodes a, b in $\mathcal{L}(G)$ if the corresponding edges in G are adjacent.
  That is, if edge b in G starts at the node at which a ends.

Problem 37:
Draw the line graph for the graph below.
Have an instructor check your solution.



Definition 38:
We say a graph G is *connected* if there is a path between any two vertices of G.

Problem 39:
Show that if G is connected, $\mathcal{L}(G)$ is connected.

Definition 40:
Consider $\mathcal{L}(G_n)$, where G_n is the n^{th} order De Bruijn graph.

We'll need to label the vertices of $\mathcal{L}(G_n)$. To do this, do the following:

- Let a and b be nodes in G_n
- Let $\mathtt{x}$ be the first letter of a
- Let $\mathtt{y}$, the last letter of b
- Let $\overline{\mathtt{p}}$ be the prefix/suffix that a and b share.
  Note that $a = \mathtt{x}\overline{\mathtt{p}}$ and $b = \overline{\mathtt{p}}\mathtt{y}$,

Now, relabel the edge from a to b as $\mathtt{x}\overline{\mathtt{p}}\mathtt{y}$.
Use these new labels to name nodes in $\mathcal{L}(G_n)$.

Problem 41:
Construct $\mathcal{L}(G_2)$ and $\mathcal{L}(G_3)$. What do you notice?
Hint: What are $\mathcal{L}(G_2)$ and $\mathcal{L}(G_3)$? We've seen them before!
You may need to re-label a few edges.

Part 5: Sturmian Words

A De Bruijn word is the shortest word that contains all subwords of a given length.
Let's now solve a similar problem: given an alphabet, we want to construct a word that contains exactly m distinct subwords of length n.

In general, this is a difficult problem. We'll restrict ourselves to a special case:
We'd like to find a word that contains exactly $m+1$ distinct subwords of length m for all $m < n$.

Definition 42:
We say a word w is a *Sturmian word* of order n if $\mathcal{S}_m(w) = m+1$ for all $m \leq n$.
We say w is a *minimal* Sturmian word if there is no shorter Sturmian word of that order.

Problem 43:
Show that the length of a Sturmian word of order n is at least $2n$.

Problem 44:
Construct R_3 by removing four edges from G_3.
Show that each of the following is possible:

- R_3 does not contain an Eulerian path.
- R_3 contains an Eulerian path, and this path constructs a word w with $\mathcal{S}_3(w) = 4$ and $\mathcal{S}_2(w) = 4$.
- R_3 contains an Eulerian path, and this path constructs a word w that is a minimal Sturmian word of order 3.

Problem 45:
Construct R_2 by removing one edge from G_2, then construct $\mathcal{L}(R_2)$.

- If this line graph has four edges, set $R_3 = \mathcal{L}(R_2)$.
- If not, remove one edge from $\mathcal{L}(R_2)$ so that an Eulerian path still exists and set R_3 to the resulting graph.

Label each edge in R_3 with the last letter of its target node.
Let w be the word generated by an Eulerian path in this graph, as before.

Attempt the above construction a few times. Is w a minimal Sturmian word?

Theorem 46:
We can construct a minimal Sturmian word of order $n \geq 3$ as follows:

- Start with G_2, create R_2 by removing one edge.
- Construct $\mathcal{L}(G_2)$, remove an edge if necessary.
  The resulting graph must have an 4 edges and an Eulerian path. Call this R_3.
- Repeat the previous step to construct a sequence of graphs R_n.
  R_{n-1} is used to create R_n, which has $n+1$ edges and an Eulerian path.
  Label edges with the last letter of their target vertex.
- Construct a word w using the Eulerian path, as before.
  This is a minimal Sturmian word.

For now, assume this theorem holds. We'll prove it in the next few problems.

Problem 47:
Construct a minimal Sturmain word of order 4.

Problem 48:
Construct a minimal Sturmain word of order 5.

Problem 49:
Argue that the words we get by Theorem 46 are minimal Sturmain words.
That is, the word w has length $2n$ and $\mathcal{S}_m(w) = m + 1$ for all $m \leq n$.